

Electron Gun Isolated Filament High Voltage Power Supply

Specifications:

Filament current: 0-5A adjustable by 10-turn panel potentiometer

Filament voltage: 0-7.5V

Filament isolation: 30kV

Filament bias voltage: 0-30kV adjustable by 10-turn panel potentiometer

Filament bias current: 100uA / 250uA / 1mA

Grid bias voltage source: 0-30kV adjustable by 10-turn panel potentiometer

Grid bias current: 100uA / 250uA / 1mA


Filament power connectors: 30kV 5A rated isolated from Ground co-axial connectors

Filament bias supply connector: 30kV co-axial connector

Grid bias supply connector: 30kV co-axial connector

Power: 230V 5A

Case: 19" 4U height casing

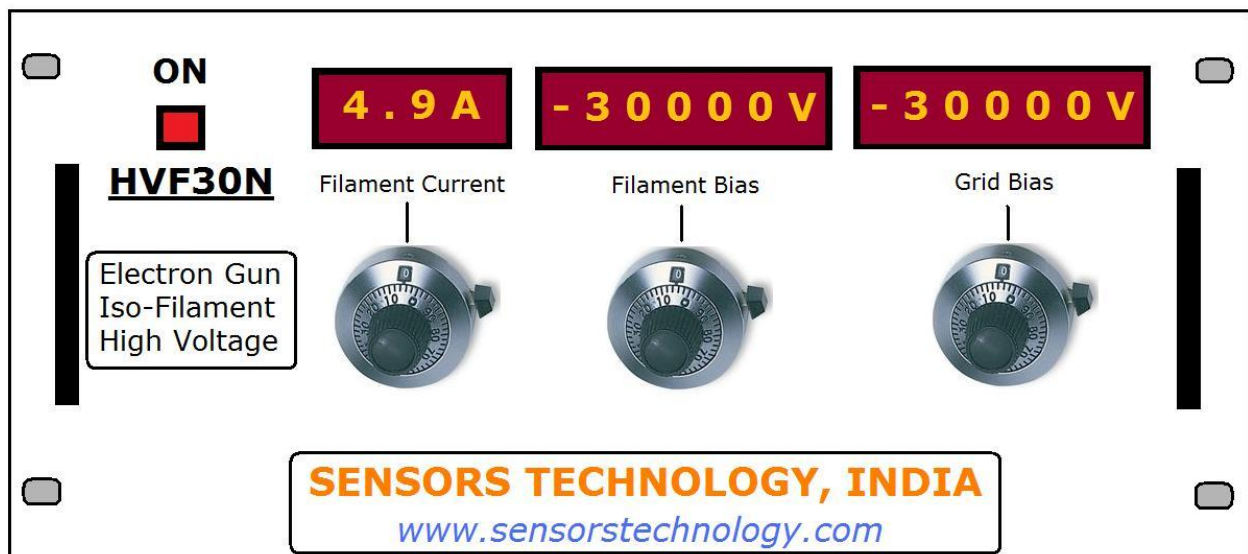

Contact:

Sensors Technology Private Limited

www.sensorstechnology.com